

Designation IEC  
System  
Shelf Life (Coding)\*  
Nominal Voltage [V]  
Typical Capacity C [mAh]  
Permissible Temperature Range  
Weight, approx. [g]  
Volume [ccm]


LR14  
Zn-MnO<sub>2</sub> (Alkaline)  
10 years  
1.5  
7800 (discharge with high-resistance)  
- 20 °C ... 50 °C  
65,8  
26

Dimensions [mm]

min: max:

Ø	24.9	26.2
A	-	50.0
B	48.6	-
C	13.0	-
E	-	0.9
F	-	7.5
G	1.5	-

**Typical Capacities (at 20°C)**

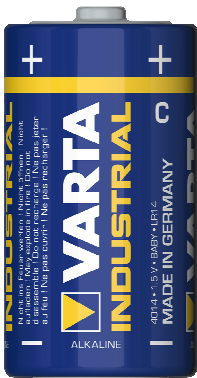

Discharge Type	Load	End Voltage[V]	0.9
4M/H,8H/D,7D/W	3.9 Ω	Time [h]	22,2
Portable lighting		Capacity [Ah]	6,64
		Energy [Wh]	7,80
Discharge Type	Load	End Voltage[V]	0.8
1H/D,7D/W	3.9 Ω	Time [h]	24,8
Toy		Capacity [Ah]	6,88
		Energy [Wh]	7,53
Discharge Type	Load	End Voltage[V]	0.9
4H/D,7D/W	20 Ω	Time [h]	122,5
Radio		Capacity [Ah]	7,48
		Energy [Wh]	9,41

**No publication or circulation of data to third parties without consent of VARTA Consumer Batteries**

\* In consideration of typical loss of capacity at storage and application.